

# Smart Dupline® Decentralized Analog Output Module Type SHPOUTV224

CARLO GAVAZZI



- 2 x 0-10 VDC analog outputs
- 24 VDC
- Small dimension housing for a decentralized installation inside wall-box or environmental sensor housings
- Smart Dupline® protocol
- Operates only with Sx2WEB controller


## Product Description

SHPOUTV224 is an output module with 2 analog outputs. The compact size of the module makes it possible to fit it into a wall-box or an environmental sensor housing, thereby enabling a decentralized installation concept where the Dupline® bus and DC power are multi-dropped from sensor to sensor. This simplifies

the wiring compared to traditional star wiring connections, reduces the number of DDCs and sub-panels required, and provides a higher flexibility for last-minute changes and enhancements. The module has 2 x 0-10 VDC outputs. It is fully programmable via the SH tool.

## Ordering Key

**SH P OUT V 2 24**

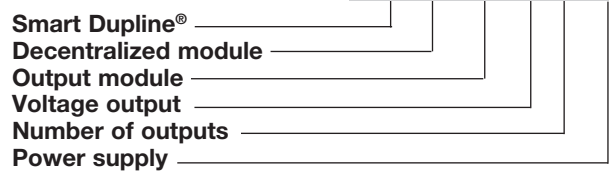

## Type Selection

### Output module

2

### Type

0-10V

### Supply: 24 VDC ± 20%

SHPOUTV224

## Supply Specifications

### Power Supply

|                             |   |
|-----------------------------|---|
| Operational voltage range   | 24 VDC ±20%                                     |
| Max ripple                  | 1 V   |
| Reverse polarity protection | Yes   |
| Overvoltage category        | Overvoltage cat. II (IEC 60664-1, par. 4.3.3.2) |
| Rated impulse voltage       | 500 V (1.2/50µs) (IEC 60664-1, tab. F.1)        |
| Typ. current consumption    | 15 mA   |
| Power on delay              | ≤ 2 s   |
| Power off delay             | ≤ 1 s   |

## Specifications for Analog outputs

### Output 1 and 2

|                    |                                     |
|--------------------|-------------------------------------|
| Output type        | 2 x 0-10 VDC                        |
| Inaccuracy         | < 0.5% fs (over entire temp. range) |
| Cable length       | < 5 m                               |
| Load, each channel | max 1.5 mA                          |

## Dupline® Specifications

|                          |                |
|--------------------------|----------------|
| Voltage                  | 8.2 V          |
| Maximum Dupline® voltage | 10 V           |
| Minimum Dupline® voltage | 5.5 V          |
| Maximum Dupline® current | 1.5 mA         |
| Analog protocol          | Smart Dupline® |


## General Specifications

|                                  |                               |
|----------------------------------|-------------------------------|
| <b>Environment</b>               |                               |
| Pollution degree                 | 2(IEC 60664-1, par. 4.6.2)    |
| Operating temperature            | 0 to +50°C (-4 to +122°F)     |
| Storage temperature              | -50 to +85°C (-58 to + 185°F) |
| <b>Humidity</b> (non-condensing) | 20 - 90%                      |
| <b>Housing</b>                   |                               |
| Material                         | Macromel                      |
| Colour                           | Ambra                         |
| <b>Dimensions</b> (h x w x d)    | 50 x 30 x 18 mm               |
| <b>Weight</b>                    | 50 g                          |
| <b>Protection degree</b>         | IP20                          |
| <b>Terminal block</b>            |                               |
| Power supply input               | 4 x spring terminal           |
| Dupline® bus                     | 4 x spring terminal           |
| Cross-sectional area             | Terminal: 1.5 mm <sup>2</sup> |
| <b>Cable x 4</b>                 |                               |
| 5                                | (GND)                         |
| 6                                | Out 2                         |
| 7                                | GND                           |
| 8                                | Out 1                         |
| Wire cross section               | 0.14 mm <sup>2</sup>          |
| Wire length                      | 0.25 m                        |

|   |                            |
|---|----------------------------|
| <b>EMC</b>                                |                            |
| Immunity                                  | EN61000-6-2                |
| - Electrostatic discharge                 | EN61000-4-2                |
| - Radiated radiofrequency                 | EN61000-4-3                |
| - Burst immunity                          | EN61000-4-4                |
| - Surge                                   | EN61000-4-5                |
| - Conducted radiofrequency                | EN61000-4-6                |
| - Power frequency magnetic fields         | EN61000-4-8                |
| - Voltage dips, variations, interruptions | EN61000-4-11               |
| Emission                                  |                            |
| - Conducted and radiated emissions        | CISPR 22 (EN55022), cl.B   |
| - Conducted emissions                     | CISPR 16-2-1 (EN55016-2-1) |
| - Radiated emissions                      | CISPR 16-2-3 (EN55016-2-3) |

|                  |                    |
|------------------|--------------------|
| <b>Approvals</b> | CE                 |
|                  | cULus according to |
| UL60950          |                    |

## Wiring Diagram

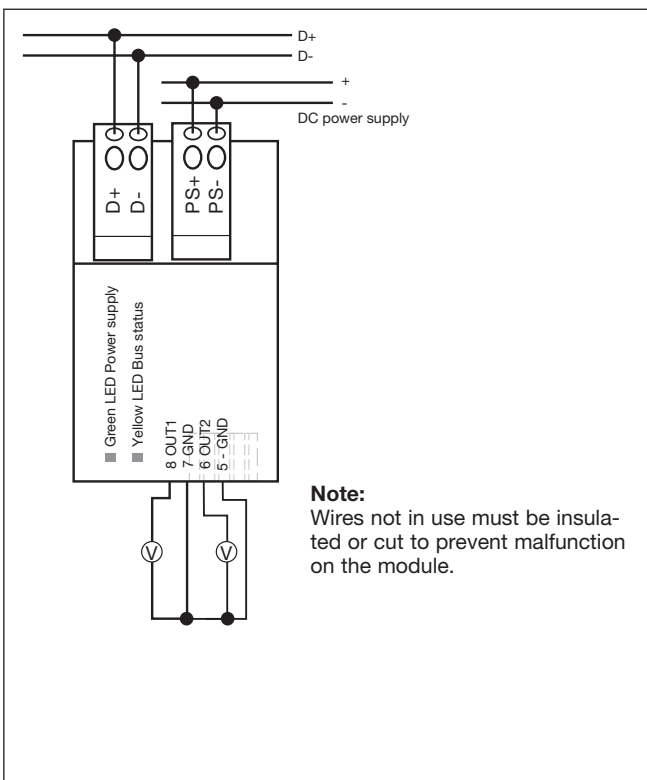

## Dimensions

